

Pass Notch Antenna Duplexer

Electrical Specifications


Frequency Band	300-650 MHz
Offset (Min-Max.)	3 MHz
Input Power (Max.)	150 W
Number of Resonators	10
Isolation Tx-Rx (Min. / Typ.)	80 / 90 dB
VSWR (Max.)	1.25:1
Impedance (Nom.)	50 Ω
RF Connectors	N Female

Mechanical Specifications

Finish	Gray Paint
Cavity Size / Quantity	4" / 10
Rack Mount	19" EIA
Rack Units	9 RU
Overall Size (HxWxD)	15.75" x 19" x 17" (400 x 483 x 432 mm)
Net Weight	48.85 lbs (22.2 kg)
Ship Weight	59 lbs (26.8 kg)

Environmental Specifications

Operating Temp. Range	-22 to 140 °F (-30 to +60 °C)
-----------------------	-------------------------------

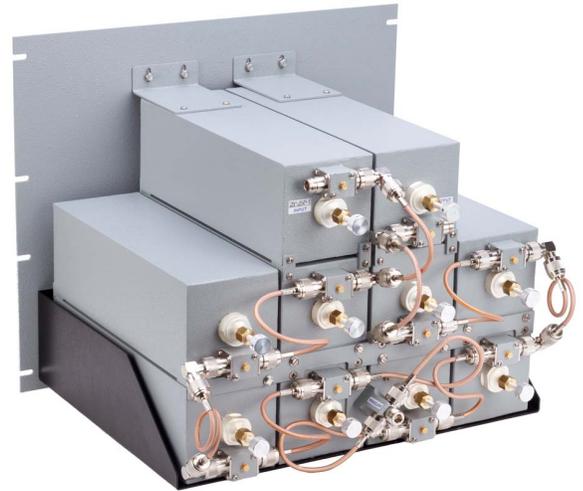

EMR pass-notch duplexers allow for the simultaneous use of a transmitter and receiver on a single common antenna. Our signature square cavities provide greater Q while requiring less space than conventional round cavities.

Product Features

- High Q Square cavities
- Space saving design
- Low insertion loss

