

## Band Pass Cavity Resonator

### Electrical Specifications


Frequency Band	440-512 MHz
Attenuation	See response curve
Input Power (Max.)	150 W
Insertion Loss Range	1.0 - 4.0 dB
VSWR (Max. / Typ.)	1.5:1 / 1.25:1
Electrical Length	1/4 $\lambda$
Impedance (Nom.)	50 $\Omega$
RF Connectors	N Female

### Mechanical Specifications

Finish	Gray Paint
Number of Cavities	2
Cavity Body Dimensions (WxD)	4" x 4" (102 x 102 mm)
Cavity Height w/ Tuning Rod	14-16" (356-406 mm)
Rack Mount	19" EIA
Rack Units	10 RU (Max.)
Overall Size (HxWxD)	14 - 16" x 19" x 4.5" (356-406 x 483 x 114 mm)
Net Weight	9.5 lbs (4.3 kg)
Ship Weight	16 lbs (7.3 kg)

### Environmental Specifications

Operating Temp. Range	-22 to 140 °F (-30 to +60 °C)
-----------------------	-------------------------------

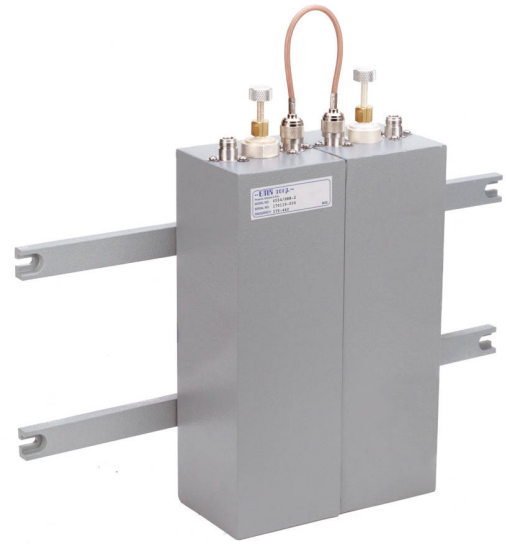

EMR Band Pass Cavities are 1/4 wavelength, high Q cavity filters with excellent selectivity. Bandpass cavities reject frequencies outside of a narrow pass band. These cavities may be factory tuned to specific frequency and are field tunable. Multiple cavities may be connected for greater selectivity with minimal insertion loss and wider pass bandwidths. Multi-cavity configurations come standard with 19 inch EIA rack mounting bars or panel with chassis tray.

### Product Features

- Excellent Frequency Stability
- High-Q Square Cavities
- Low Insertion Loss
- 5 Year Warranty

