

Filter Ferrite Transmitter Combiner

Electrical Specifications


Frequency Band	440-512 MHz
Freq. Spacing (Min.)	300 kHz
Number of Channels	3
Power Per Channel (Max.)	50 W
Insertion Loss Tx (Max. / Typ.)	2.7 / 1.7 dB
Isolation Ant-Tx (Min. / Typ.)	30 / 35 dB
Isolation Tx-Tx (Min. / Typ.)	40 / 45 dB
Impedance (Nom.)	50 Ω
VSWR I/O (Max.)	1.1:1 / 1.25:1
Isolator Stage	Single
RF Connectors	N Female

Mechanical Specifications

Finish	Gray Paint
Rack Mount	19" EIA
Rack Units	9 RU
Cavity Body Dimensions (WxD)	7" x 7" (178 x 178 mm)
Overall Size (HxWxD)	15.75" x 19" x 18" (400 x 483 x 457 mm)

Environmental Specifications

Operating Temp. Range	-22 to 140 °F (-30 to +60 °C)
-----------------------	-------------------------------

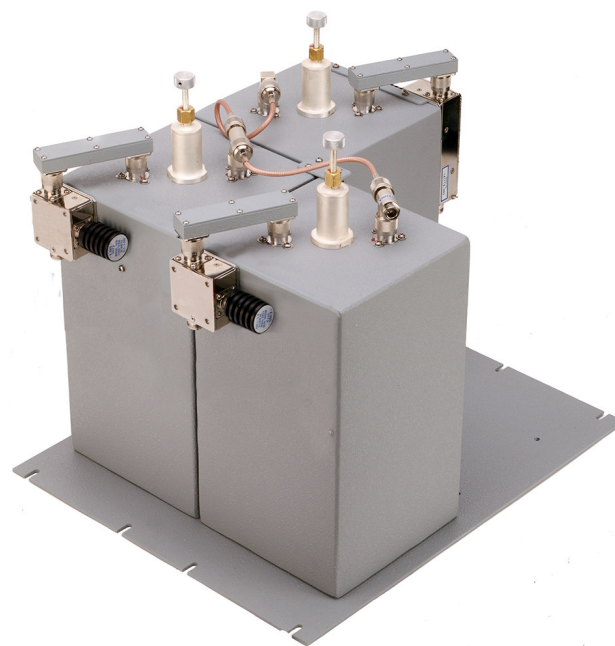

EMR Filter-Ferrite Transmitter Combiners use space saving, High-Q square cavity resonators, and wideband isolators providing lower insertion loss than hybrid designs. Standard units are mounted to a 19 inch EIA rack. Multiple mounting and free standing configurations available.

Product Features

- High-Q Square Cavities
- Low Insertion Loss
- 5 Year Warranty

